

**TESmart**

# User **2x3** HDMI+DP KVM Switch Manual

HDK203 Master 24

To Enjoy Smart

HDK203 Master 24

English





**English**





## **Preface**

It's our great honor that you have chosen the KVM Switch produced by our company, Tesla Ele Technology Co.,Ltd. In this user manual, you will learn how to operate and use this product. Please read this user manual comprehensively before use. If you have any questions, comments or suggestions, please contact us via the following email:

support@tesmart.com.

## **Copyright Notice**

The user manual, compiled by Tesla Elec Technology Co.,Ltd, shall not be duplicated or translated by any person or organizations without written permission. This user manual shall not be used for commodity transaction in any form or by any means (electronically, mechanically, photocopying or recording, etc.) or be used for any business practices or profitable activities. The ownership of the trade names and brand names adopted in this user manual belongs to their companies.

## **Product Information**

For more information about TESmart products and how they can help you to enjoy your job, please visit the following TESmart website or contact an TESmart Authorized Reseller.

---

**[www.tesmart.com](http://www.tesmart.com)**

---

# Contents


1. Safety Tips and Warnings .....	01	10. Operation Method.....	22
2. Battery Description.....	02	10.1 Front Panel Button Switching Method	
3. Warranty Information.....	03	10.2 IR Remote Control	
4. Preface.....	04	10.3 Keyboard Hot Keys	
5. Features.....	05	11. Change Hot Key Combination.....	30
6. Packing List.....	06	12. UART Command Description.....	31
7. Panel Description.....	07		
8. Connection Description.....	11		
8.1 Connection Diagram			
8.2 Connection Preparation			
8.3 Connection Steps			
8.4 KVM Workbench			
9. Function Description.....	18		
9.1 Display Mode Description			
9.2 Keyboard and Mouse Emulation Mode			
9.3 Built-in Network Switch			

## 1. Safety Tips and Warnings

**Tips:** Please read the safety tips and warnings for triple monitor KVM Switch comprehensively before use. Use this produce in accordance with its instructions, safety tips and warnings to prevent unnecessary damage to the product and potential dangers to users.

- ⚠ Keep the product away from water.
- ⚠ Clean the product with dry cloth.
- ⚠ Use the product in accordance with its instructions and do not block its vents.
- ⚠ Keep the product away from ignition sources, such as heat sinks, heat accumulators, stovepipes and other heat production settings (including audio amplifiers).
- ⚠ Do not touch the product and the power cord with wet hands so as to lower the risk of electric shock and damage to the product. Do not let the product get wet or become damp.
- ⚠ Unplug the power supply of this product in thunderstorm days or when it has been not used for a long time.
- ⚠ Do not expose this product and its battery to open fire or overheating environment. Dispose the waste battery in accordance with instructions.
- ⚠ Users shall not remove and repair the product without authorization.

## 2. Battery Description

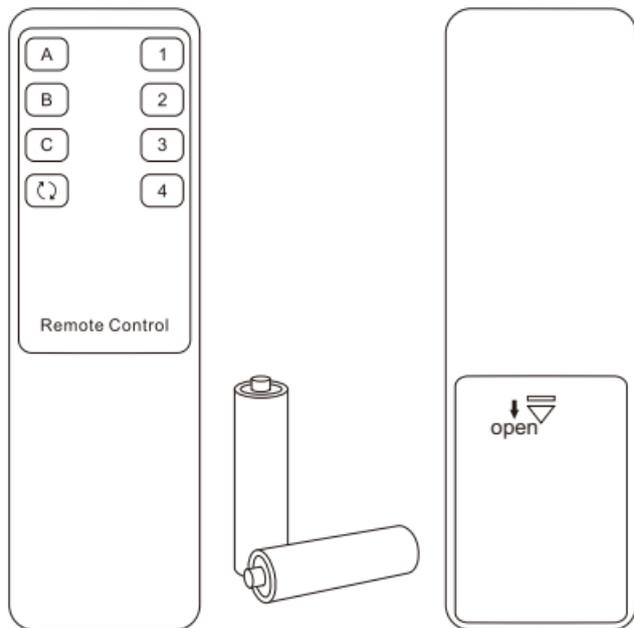

**Tips:** By default, the remote control is not equipped with batteries, due to the safety requirements of some express companies. Install AAA dry cells before use.

**Caution:** Improper disposal of the lithium battery may cause an explosion. Do not throw the battery into fire. Keep the battery away from children. Dispose the waste battery in accordance with local regulations.



### 3. Warranty Information

We warrant this product as free of defects in material and workmanship for a period of one (1) year from the date of shipment. If during the period of warranty this product proves defective under normal use, we will repair or replace this product, provided that this product has not been subjected to mechanical, electrical, or other abuse or modifications. If it fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for six (6) months from the day of reshipment to the buyer.

## 4. Preface

Dear Users,

2x3 HDMI+DP Triple Monitor KVM Switch can easily integrate cross-platform computer devices and greatly simplify the devices management. Support managing a triple-display multimedia workstation, this significantly improves productivity. With both HDMI and DP input ports, compatibility with input sources is enhanced. It has the same effect as connecting the PC directly to 3 displays. The KVM also supports displaying different PCs on 3 monitors.

This KVM support USB 3.2 Gen 1 with superspeed data transfer rate. The DisplayPort interface provides up to 8K@60Hz resolution that displays the most vivid high-definition images available while producing premium sounds. You can switch input ports with front panel button, IR signals, mouse wheel and keyboard hot keys. At the same time, the keyboard and mouse modes can greatly improve the KM compatibility.

**Tips:** If you need to control more computers or conduct more complex and professional switching, you can also choose other products of our company. For more details, please visit our official website: [www.tesmart.com](http://www.tesmart.com).

## 5. Features


- Using 3 monitors, 1 set of keyboard and mouse to control 2 computers
- HDMI 2.1 compliant, has 48Gbps bandwidth and also support VRR, FVA and ALLM
- Support resolution up to 8K(4320p)@60Hz 4:4:4 and is backward compatible with 4K(2160p)@60Hz/120Hz/144Hz
- HDCP 2.3 compliant, and DSC 1.2a compliant
- Support HDR 10 and Dolby Vision
- Support 2 display modes
- Support Gigabit wired network connection, 2 PCs connected to KVM can access to the network with only one network cable
- Support USB 3.2 Gen 1 with super-speed data transfer rate
- With EDID emulators in each input port, it can keep PCs always having correct display information
- Keyboard and mouse support passthrough mode and legacy emulation mode, significantly improving compatibility for keyboards and mice.
- Support fast channel switching through panel keys, IR, mouse wheel and keyboard hotkeys
- Built-in RGB lighting effects, you can switch different lighting effects using hotkeys for a personalized experience.

## 6. Packing List


- 1 \* 2x3 HDMI+DP Triple Monitor KVM Switch
- 2 \* KVM Cables
- 4 \* DP Cables
- 1 \* IR Remote Control
- 1 \* DC 12V Power Adapter
- 1 \* User Manual

**Tips:** After receipt of the product, please check the packing list carefully to make sure that no components have been lost and no damage to the product has been caused during transportation. If you have any problem, please contact us at any time.


## 7. Panel Description

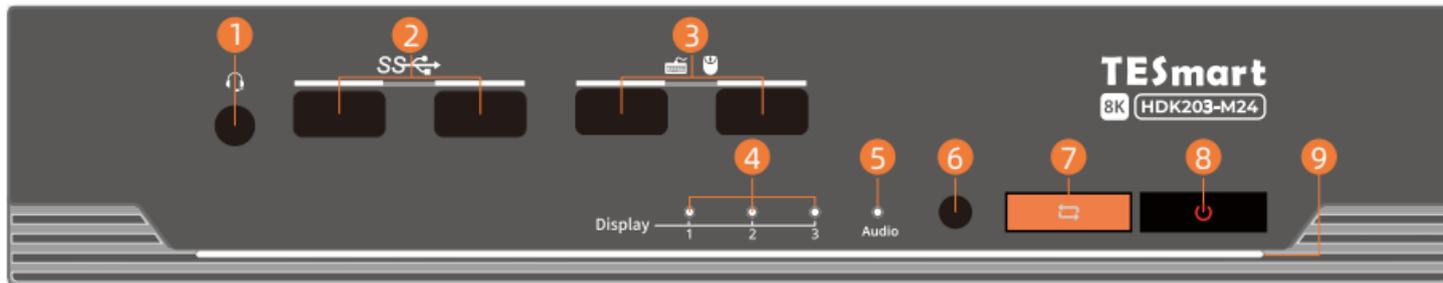


ID	Name	Function
1	3.5mm audio/mic	Integrated microphone and L/R audio output.
2	USB 3.2 Gen 1 ports	Connect to USB devices.
3	Keyboard and mouse input	For USB keyboard and mouse input.
4	Display status indicators	Display the current output status of each monitor.

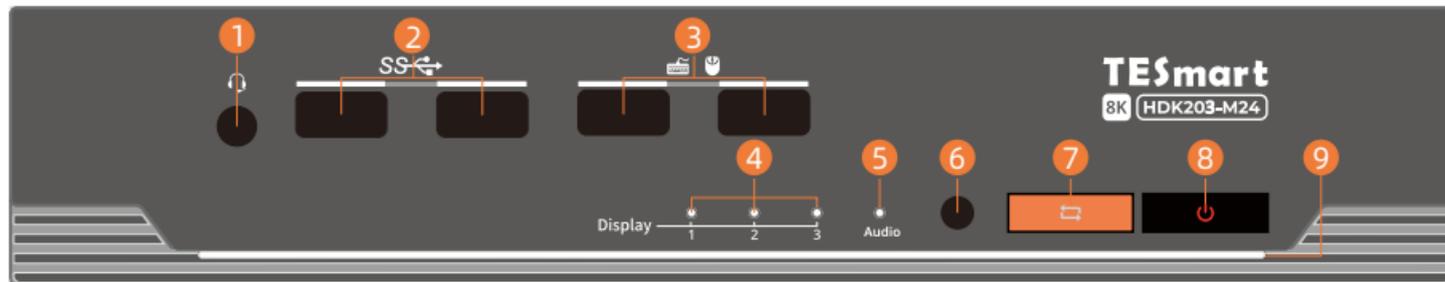

ID	Name	Function
5	Audio and USB 3.0 indicator	Indicate the current path of audio and USB 3.0.
6	IR Receiver	Receive IR remote signal.
7	Input selection button	Press to switch input sources.
8	Power switch	Press for about 2 seconds to turn on or turn off power supply.
9	RGB LED strip	Features 4 lighting modes to match your atmosphere. Please refer to page 30 for how to switch different modes.

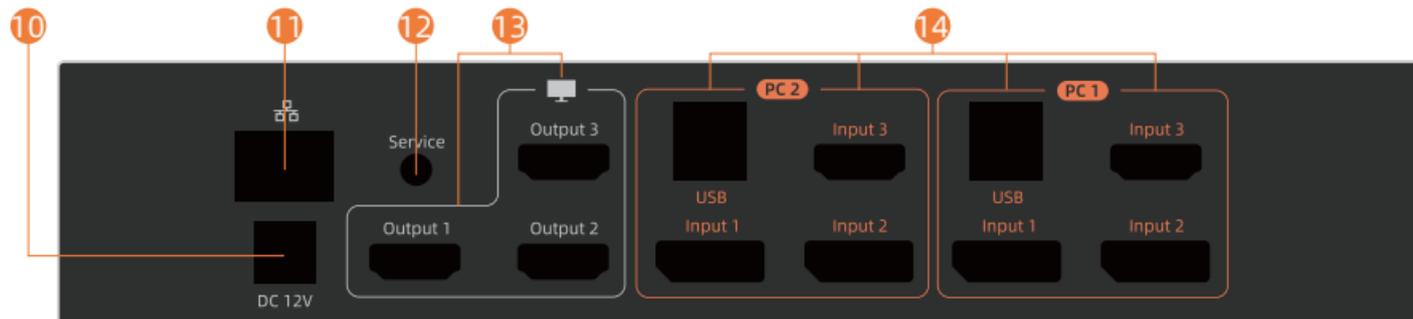


ID	Name	Function
10	DC 12V	12V DC power supply.
11	LAN port	Insert the network cable into this port to let the 2 input PCs to connect to the local network area.
12	UART command interface	Support external UART commands for channel switch and functionality control.

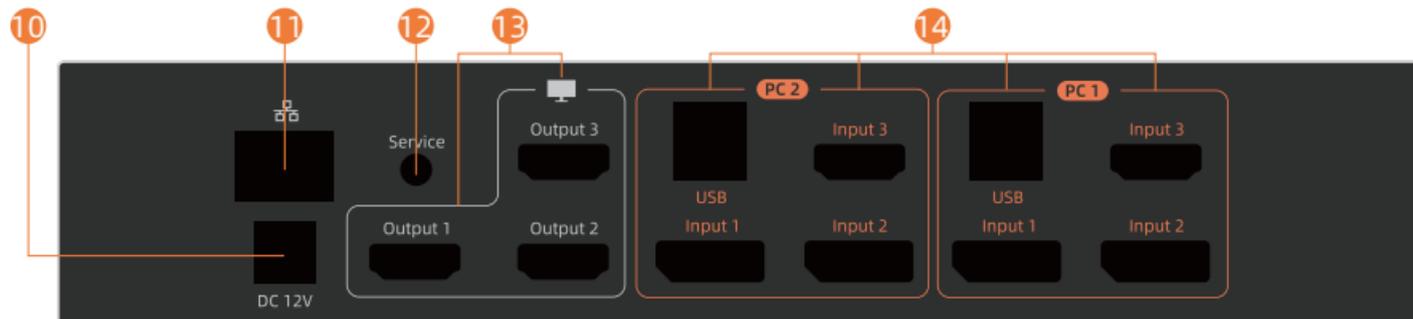

ID	Name	Function
13	HDMI outputs	Connect to 3 HDMI displays for video output.
14	KVM input ports group	2 PCs can be connected to the KVM at the same time. Each group contains 2 DP ports (marked as Input 1/2) , 1 HDMI ports (marked as Input 3) and a USB port. Connect the ports to corresponding input devices for signal input.

## 8. Connection Description

### 8.1 Connection Diagram

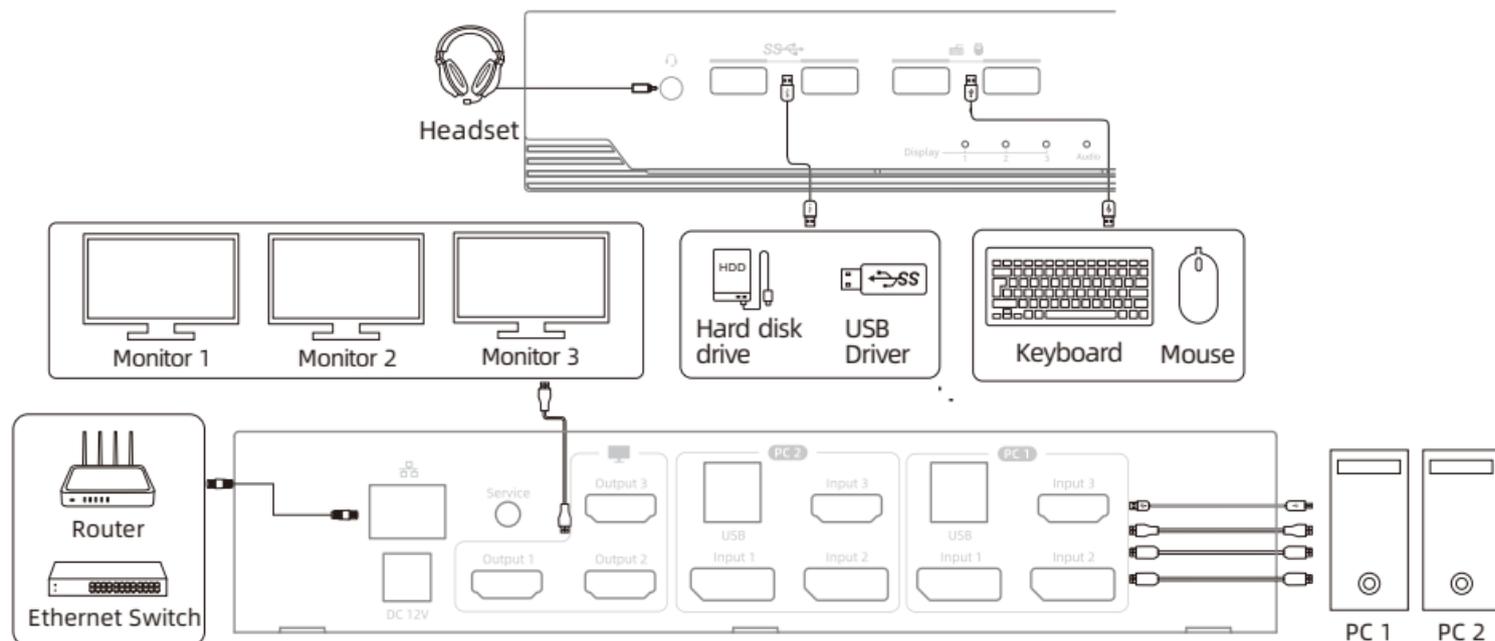

**Tips:** For your better experience, please use HDMI 2.1 cables to connect to the displays.

## 8.2 Connection Preparation

- Take into consideration all devices required to be connected and prepare a workbench large enough before the connection.
- Lay out the cables properly to facilitate the layout of power supply as a lot of power sockets and plug boards will be adopted in connection.
- Prepare different sticker labels to mark cables as a lot of cables will be adopted in connection.



## 8.3 Connection Steps


1. Connect PC1 with 1 KVM cable and 2 DP cable, connect PC1 to the DP ports group on the KVM, use USB-A end to connect each PC and USB-B end to connect the KVM. Connect PC2 in the same way.



2. Connect KVM's HDMI output ports to 3 HDMI displays with 3 HDMI cables.



3. Connect external mouse and keyboard to KVM's keyboard and mouse input port.

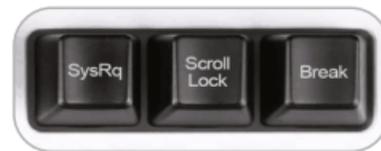


**Tips:** For the normal service of hotkeys, we recommend you use the full-key external keyboard with a separate **[Scroll Lock]** key (as shown above).

4. Connect USB 3.0 devices to KVM's standard USB 3.0 ports.



5. Connect external audio device to KVM's L/R out port.

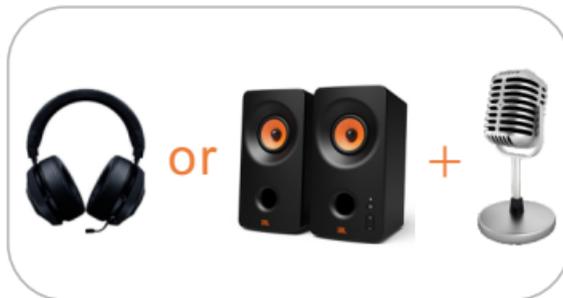

6. Use 1 network cable, one end is connected to the RJ45 port, the other end is connected to a switch or a router.



7. Connect the power cable to KVM's DC 12V port and plug it to a power socket.



8. By now, the connection has been completed. Turn on the power supply and the KVM Switch will begin to work.

**Tips:** By default, the network cable is not included in the package.

## 8.4 KVM Workbench

A workbench with 2x3 triple Monitor KVM Switch successfully connected is shown as below:



## 9. Function Description

### 9.1 Display Mode Description


The 2x3 HDMI+DP KVM Switch support 2 display modes. You can choose to implement 3-screen extended display or duplicate display or display different PCs on 3 monitors.

#### Display Mode 1:

Duplicate 3 displays



Extend 3 displays

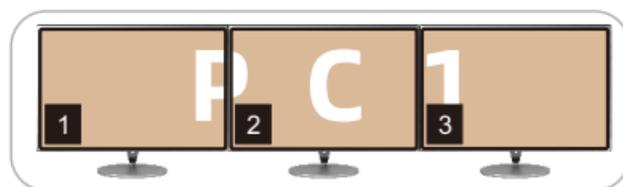

#### Display Mode 2:


Display different PCs on 3 monitors



In this mode, you can show one PC on any two monitors connected to the KVM and the other PC on the remaining monitor. Use the front panel, hotkeys, or IR control to switch between PCs and monitors.

When different PCs are displayed on different monitors, you can double-click the right [Alt] to switch the KM focus between two PCs.

- Tips:**
1. About display mode 1, you can set the duplicate mode or extend mode in the Display Settings of the current selected PC.
  2. When any PC is expanded screens, there is only one main display, and it is fixed to the display connected to a certain output port when switching (which display is determined by the operating system). If you need to switch the main screen to display on other output displays and their display order, you need to set manually in the Display Settings on the current selected PC.
  3. Please refer to Chapter 10 for detailed information about how to switch between different modes.

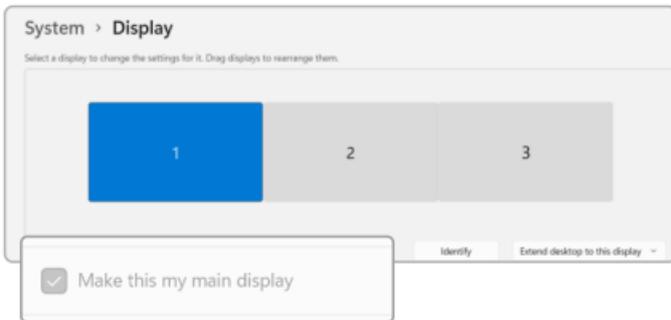

## 9.2 Keyboard and Mouse Emulation Mode

We provide two keyboard and mouse modes: Pass Through Mode and Legacy Emulation Mode. Pass Through mode supports most keyboard and mouse drivers and multifunction keyboards and mice. Legacy Emulation Mode ensures the normal functioning of the keyboard, mouse, and hotkey features.

- Typically, we recommend using Passthrough Mode for an optimal user experience, allowing you to:




If you encounter issues with the keyboard and mouse in Passthrough Mode, we recommend switching to Legacy Emulation Mode.

- Tips:**
1. To toggle between two modes, please refer to Page 26. After toggled, please restart the KVM.
  2. In Legacy Emulation Mode, the keyboard and mouse control software will no longer be available.

### 9.3 Built-in Network Switch

The 2x3 KVM Switch have a built-in USB Ethernet Adapter, which adds a standard RJ45 port to all the PC that is connected to the KVM and allows you to connect your computers to a router or network switch for gigabit wired network connection. Full 1000Mbps Ethernet for fast, stable data transfer, more reliable than most wireless connections. This feature has been added with a switch, allowing you to freely choose to enable or disable it.

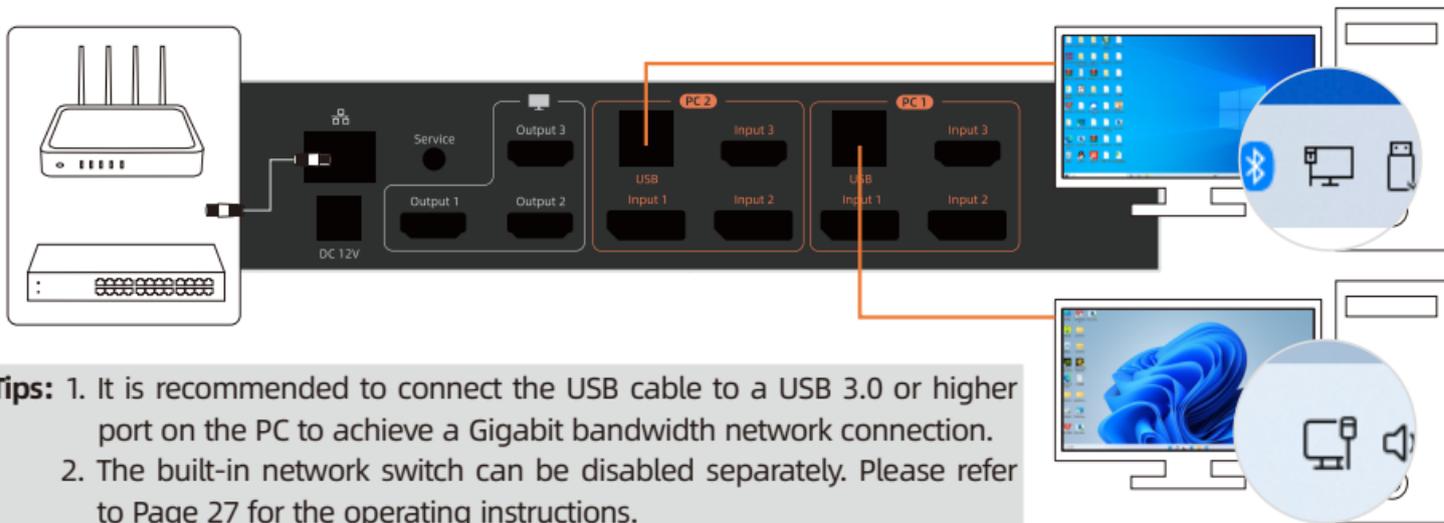


- Tips:**
1. It is recommended to connect the USB cable to a USB 3.0 or higher port on the PC to achieve a Gigabit bandwidth network connection.
  2. The built-in network switch can be disabled separately. Please refer to Page 27 for the operating instructions.

## 10. Operation Method


### 10.1 Front Panel Button Switching Method

The 2x3 HDMI+DP triple monitor KVM Switch can switch to any input devices at any time with front panel keypad, IR remote control and keyboard hot keys. You can choose your favorite switching method according to your personal needs and habits.

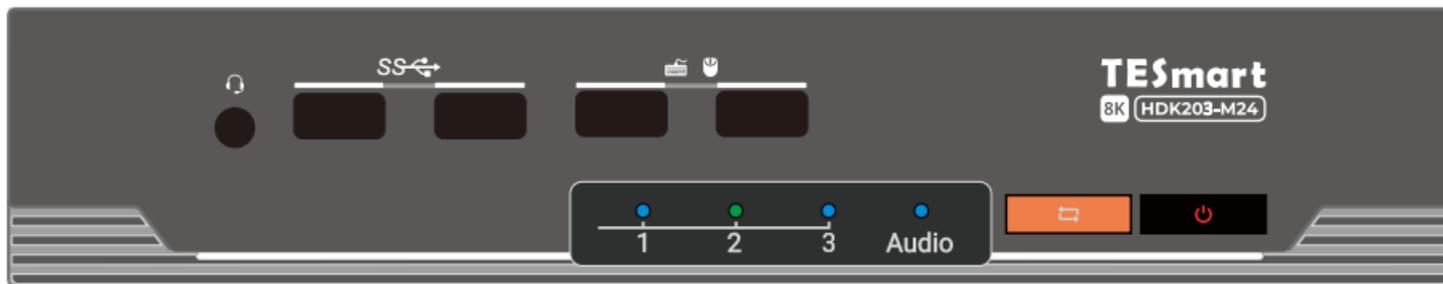

- The blue light indicates PC1 and the green light indicates PC2.
- Press  button to switch between PCs on display mode 1.

## 10.2 IR Remote Control

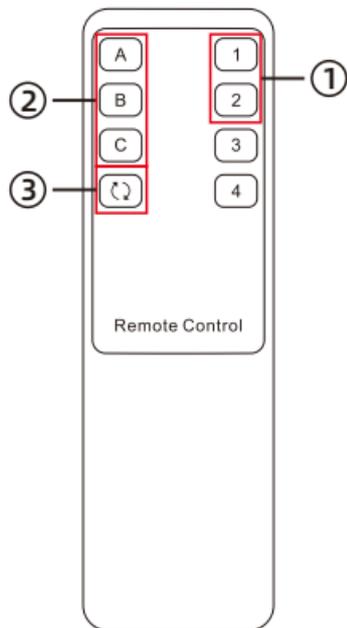

- ① — Press directly to select among 2 PCs, and 3 displays will display the selected PC at the same time. (i.e. display mode 1)
- ② — Press the key, and then press the [1~2] key to make the selected monitor display the selected PC. (i.e. display mode 2)
- ③ — Turn off/on buzzer sound.

**Tips:** Unspecified buttons at above are non-functional.

## 10.3 Keyboard Hot Keys

- Use external keyboard hot keys to switch the input source or set up some other functions.

**Tips:** The keyboard hot keys can only work with external keyboard correctly connected to the keyboard and mouse input port of the KVM.

After press **[Right-Ctrl]** key twice within 2 seconds then please enter the commands within 3 seconds and the KVM will execute the corresponding commands.

Select previous input port:

**[Right-Ctrl]→[Right-Ctrl]→[PgUp]**



Select next input port:

**[Right-Ctrl]→[Right-Ctrl]→[PgDn]**



Select port by port number(i.e. display mode 1):

**[Right-Ctrl]→[Right-Ctrl]→[1]~[2]**



Switch PCs on different monitors separately(i.e. display mode 2):

Monitor 1: [Right-Ctrl] → [Right-Ctrl] → [←]



Monitor 2: [Right-Ctrl] → [Right-Ctrl] → [↓]



Monitor 3: [Right-Ctrl] → [Right-Ctrl] → [→]



Switch keyboard and mouse focus in display mode 2:

[Right-Alt] → [Right-Alt]



Disable/enable follow mode:

**Tips:** "Follow Mode" refers to whether the audio devices and USB 3.0 devices connected to the front panel will switch synchronously with the keyboard and mouse focus when switching.

[Right-Ctrl] → [Right-Ctrl] → [~]



**Tips:** The default setting of follow mode is enabled. When you disable it, the buzzer will emit only 1 short beep; when enable it, the buzzer will emit 2 short beeps.

**When Follow Mode is disabled, you can use the following hotkeys to switch audio and USB 3.0 channels between PCs:**

[Right-Ctrl] → [Right-Ctrl] → [0]



Toggle between keyboard and mouse modes:

[Right-Ctrl] → [Right-Ctrl] → [F2]



**Tips:** The default keyboard and mouse mode is Pass Through mode. When switching to Compatibility Mode, the buzzer will emit 2 short beeps; when switching to Pass Through Mode, the buzzer will emit only 1 short beep.

Disable/enable fan:

[Right-Ctrl] → [Right-Ctrl] → [F3]



**Tips:** The fan has 4 adjustable modes, distinguishable by the number of beeps from the buzzer. The default fan mode is 2.

Fan mode 1: The fan is disabled. Adjust to this mode, the buzzer will beep once.

Fan mode 2: The fan operates based on the actual temperature: it automatically turns on when the detected chip temperature exceeds 50°C and turns off when the temperature drops below 48°C. Adjust to this mode, the buzzer will beep twice.

Fan mode 3: The fan operates at low speed continuously. Adjust to this mode, the buzzer will beep three times.

Fan mode 4: The fan operates at high speed continuously. Adjust to this mode, the buzzer will beep four times.

Disable/enable the current displayed PC's built-in network card:

[Right-Ctrl] → [Right-Ctrl] → [F4]



**Tips:** The built-in network card is enabled by default. Enable it will trigger the buzzer to beep twice and disable it will trigger the buzzer to beep once.

Turn on/off mouse wheel switching mode:

**Tips:** Mouse wheel switching method can quickly switch input sources by mouse operation, double-click the mouse wheel to switch to the next input port. Mouse wheel switching mode is off by default. Turning on the mouse wheel switching mode will trigger the buzzer to beep twice and turning it off will trigger the buzzer to beep once.

[Right-Ctrl] → [Right-Ctrl] → [F6]



Disable or enable buzzer sound:  
[Right-Ctrl] → [Right-Ctrl] → [F11]



**Tips:** The default setting of buzzer sound is enabled. Repeat this step to disable or enable buzzer sound.

Switch lighting modes:

Turn off lighting:

[Right-Ctrl] → [Right-Ctrl] → [L] → [0]



Light effects vary with KVM indicators:

[Right-Ctrl] → [Right-Ctrl] → [L] → [1]




Marquee lighting effect:

[Right-Ctrl] → [Right-Ctrl] → [L] → [2]



Orange breathing light:

[Right-Ctrl] → [Right-Ctrl] → [L] → [3]



## 11. Change Hot Key Combinations

For your convenience, we have built-in a custom hotkey function. By setting, you can use any key on the keyboard connected to the KVM as the trigger key for the hot key command. The default hotkey trigger key is the **[Right-CTRL]**. The custom hotkey function can be set in the following ways:

### Method 1:

- After powering on the KVM, press and keep holding the [  ] button on the front panel for 10 seconds until you hear the buzzer is long beeping. When starting to set the trigger key, the buzzer will have a 5 seconds tone. Please press the key you want to use as the hot key trigger key on the keyboard within 5 seconds. After pressing the button, the prompt tone ends and the setting is complete.

### Method 2:

- Press [Right-Ctrl]→[Right-Ctrl]→[F1], then the buzzer will have a 5 seconds tone. Please press the key you want to use as the hot key trigger key on the keyboard within 5 seconds. After pressing the button, the prompt tone ends and the setting is complete.



## 12. UART Command Description

The 2x3 HDMI+DP triple-monitor KVM Switch is equipped with a UART command interface, allowing users to communicate with the KVM using UART (Universal Asynchronous Receiver-Transmitter) commands.

ID	Command	Function	configuration
1	AA BB 03 00 00 EE	Switch to PC1.	Baud rate: 38400 bps Stop bit: 1 bit Data length: 8 bits Parity bit: None
2	AA BB 03 00 01 EE	Switch to PC2.	
3	AA BB 03 01 00 EE	Switch the view of Output 1 to PC1.	
4	AA BB 03 01 01 EE	Switch the view of Output 1 to PC2.	
5	AA BB 03 02 00 EE	Switch the view of Output 2 to PC1.	
6	AA BB 03 02 01 EE	Switch the view of Output 2 to PC2.	

ID	Command	Function
7	AA BB 03 03 00 EE	Switch the view of Output 3 to PC1.
8	AA BB 03 03 01 EE	Switch the view of Output 3 to PC2.
9	AA BB 04 02 XX EE	Disable or enable buzzer sound. (XX can be any value.)
10	AA BB 05 02 00 EE	Disable RGB LED strip.
11	AA BB 05 02 01 EE	Switch the RGB LED strip lighting effects to vary with KVM indicators.
12	AA BB 05 02 02 EE	Switch the RGB LED strip lighting effects to marquee.
13	AA BB 05 02 03 EE	Switch the RGB LED strip lighting effects to orange breathing light.
14	AA BB 06 02 03 EE	Query current connection status.



**TESmart**

**To Enjoy Smart**

---

HDK203 Master 24

Tesla Elec Technology Co.,Ltd

CE FC   HDCP 

WEEE-Reg.-Nr. DE 66784279